


HCR 350

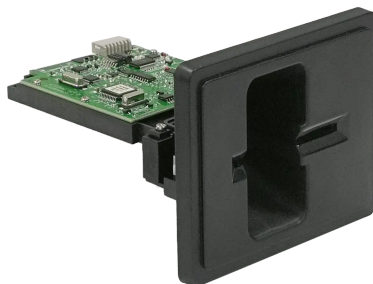

CARATTERISTICHE PRINCIPALI

HCR 350 is Custom's **hybrid reader** designed to provide reliability and business continuity in outdoor environments. One device that combines magnetic reading and smart card reading/writing, to deliver a **compact and durable solution, ideal for high-traffic applications**. HCR350 further completes Custom's range of hybrid readers, capable of meeting the most diverse needs, from self-service to access control systems.

SCHEDA TECNICA

Type	Manual insertion
Magnetic stripe	ISO 7811
Smart card	ISO 7816 Read/Write (protocol T=0 / T=1)
Paper thickness	0,76 ± 0,08 mm
Interface	USB (cable included)
SAM modules	N/A
Power supply	+5Vdc +/-5%
Power consumption	10 mA max (magnetic only), 90 mA max (magnetic + IC card)
Operating range	-10 / +55 °C; 10 to 85 RH
MCBF	Mag. Head 500K / IC landing 500K
Dimensioni	111 mm (W) x 101 mm (D) x 76 mm (H)
Certifications	FCC class A, CE class A, BSMI class A, EMV level 1