


(ISO/IEC 7811) (ISO/IEC 7816) MTBF
- RS232 USB .ICT 3Q8
SAM , 4 SAM. / ATMs ,
.

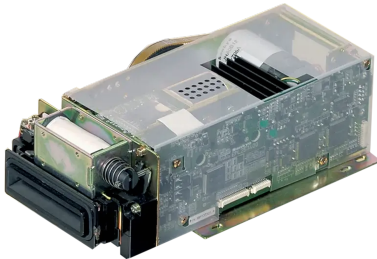

CARATTERISTICHE PRINCIPALI

Among the indicated features are **Motorized Readers/Writers for triple-track magnetic cards (ISO/IEC 7811) and chip cards (ISO/IEC 7816) with a head and high MTBF chip contact plate. Complete with full steel anti-vandal and anti-pollution shutter with mechanical switch for recognition of inserted card width and pre-head with double magnetic track. Interfaces available are RS232 and USB. ICT 3Q8 is equipped with an onboard SAM module, with the possibility of expansion up to 4 external SAM modules. These readers/writers are ideal solutions for ATMs, ticketing machines, and self-service systems.**

SCHEDA TECNICA

	3 /
IC	/
	EMV 4.0
	DLL
	RS232/USB
SAM	1

□□□	□□□□□□□□□□1-2□□□
□□	+24 Vdc
MCBF	1M pass.
□□	111.5 x 217.3 x 67.9 □□
□□	□□□ 4□□□□ SAM

MODELLI DISPONIBILI

CODICE	DESCRIZIONE
942BT080400100	MOTORIZED READER ICT3Q8-3A2180 RS232