


- 80 mm
- 58-80 g/m²
- USB+RS232
- / QR CODE
- 100 mm

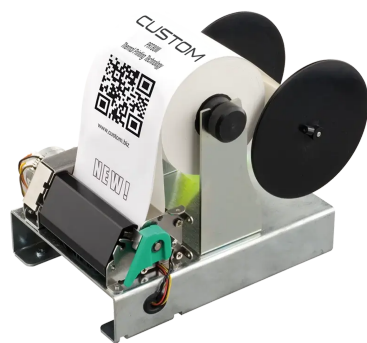

CARATTERISTICHE PRINCIPALI

80 mm 58-80 g/m²

SPECIFICHE TECNICHE

Paper width	80 mm
Paper weight	58-80 g/m²
External roll diameter	100 mm
Interfaces	RS232;USB

SCHEDA TECNICA

80 mm	80 mm
8 dots/mm	8 dots/mm
203 dpi	203 dpi
140 mm /mm	140 mm /mm
100 mm	100 mm
UPCA, UPCE, EAN13, EAN8, CODE39, ITF, CODABAR, CODE93, CODE128, CODE32, PDF417, DATAMATRIX, AZTEC, QR CODE	UPCA, UPCE, EAN13, EAN8, CODE39, ITF, CODABAR, CODE93, CODE128, CODE32, PDF417, DATAMATRIX, AZTEC, QR CODE
100 mm /mm 1 80 mm	100 mm /mm 1 80 mm

Angolo	0°, 90°, 180°, 270°
Velocità	80 mm/s
Velocità di stampa	58 mm/s 80 mm/s
Velocità di stampa	63 mm/s 80 mm/s
Velocità di stampa	100 mm/s
Interfaccia	CUSTOM/POS, PRT80, CUSTOM TPT
Interfaccia	RS232 + USB
Memoria	16 KB
Memoria	1MB, 4MB
RAM	128KB, 8MB
Dimensioni	6 x 608 x 215 mm
Software	Windows® 32/64 bit — WHQL Certified
Software	PrinterSet, CustomPowerTool, Status Monitor
Tensione	24 Vdc ± 10%
Corrente	1.2A (12,5% max)
MTBF	122.000 h (min)
Velocità di stampa	50 mm/s /100M mm/s
Temperatura	+0°C - +50°C
Dimensioni	210(L) x 178.5(H) x 136(W) mm
Peso	1.55 kg

GALLERIA



MODELLI DISPONIBILI

CODICE	DESCRIZIONE
915KW010100300	PRINTERS PRT80III USB RS232 AV