


- Journal thermal printer with rewinder
- The large paper roll assures a high print capacity
- Paper width: 80mm
- USB Interface+RS232
- 1D and 2D (QR CODE) barcode printing
- International fonts on-board

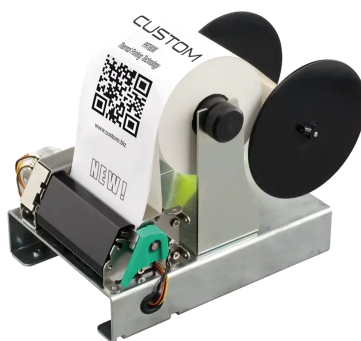

CARATTERISTICHE PRINCIPALI

Suitable for data recording applications such as self-service reports and kiosks, receipts, alarm reports, and background journals. Details are organised to facilitate quick consultation and comparison with products in the same category.

SPECIFICHE TECNICHE

Paper width	80 mm
Paper weight	58-80 g/m²
External roll diameter	100 mm
Interfaces	RS232;USB

SCHEDA TECNICA

Printing method	Thermal with fixed head
Resolution	200 dpi (8 dots/mm)
Printing speed (max)	140 mm/sec
Paper width	80 mm
Paper weight	58-80 g/m ²

External roll diameter	100 mm
Roll core diameter	25 mm
Sensors	Head temperature; paper presence; near-paper-end sensor
Emulation	CUSTOM/POS; PRT80; CUSTOM TPT
Interfaces	RS232; USB
Print Driver	Windows® (32/64 bit); Android™
Software Tools	PrinterSet; Custom Power Tool; Status Monitor; Custom Windows® API; Driver Manager
Special features	Journal printer; rewinder included
Power supply	24 Vdc ± 10%
Typical consumption	1.2 A
Print Head Life	50 km / 100M pulses
Cutter	N/A
Operating temperature	0°C ~ 50°C
Dimensions (L x W x H)	210 x 136 x 178.5 mm
Weight	1.55 kg
Box contents	device; quick guide

GALLERIA



MODELLI DISPONIBILI

CODICE	DESCRIZIONE
915KW010100300	PRINTERS PRT80III USB RS232 AV