

SM425

The new SM425 1D-2D barcode scanner, wireless and equipped with Bluetooth[®], features the most modern design together with a rugged casing and it supports IP42 sealing protection, which is particularly suitable for retail, logistic and warehouse markets. SM425 is equipped with useful functions that makes customer's operations easier and allows to save space. Equipped with excellent performance in reading most 1D barcodes and 2D, it facilitates the use of data and increases productivity. It supports barcode scanning with up to 250 mm reading depth for the majority of 1D, 2D barcodes and GS1 DataBar[™] codes. The SM425 scanner can be used both in manual mode (button) and in automatic mode, using the supplied cradle.



CARATTERISTICHE PRINCIPALI

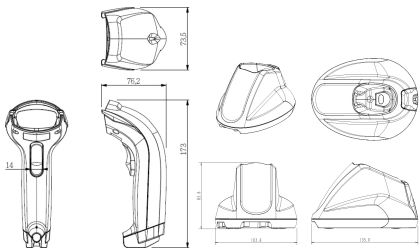
Among the listed features are **Excellent reading performance in low light environments and on labels and smartphones, Drop resistant from 150 cm, Fully configurable with the ScannerSet software**, IP42 protection against water and dust, and a Wireless Bluetooth barcode reader with a charging cradle included.


The specifications also specify markets and operational details such as **Outstanding reading performance for Databar 1D, 2D, and GS1 codes, e.g., QR codes even with 30% damage or missing pattern** and **Supports automatic reading and can operate in dark environments at 0 Lux**.

SCHEDA TECNICA

	SM425
PHYSICAL	
Scanner weight	Approx. 160 g
Cradle weight	Approx. 170 g
Dimension	Scanner: 73,5 mm W x 173 mm D x 76,2 mm H Cradle: 103,6 mm W x 135 mm D x 83,6 mm H

	SM425
PERFORMANCE	
Light source	White light LED
Sensor	1280 (H) x 800 (V) pixels
Field of view	Horizontal - 55°, Vertical - 35°
Scan rate	60 fps (at full resolution)
Reading distance	250mm@20mil/0.5mm, PCS90%
Print contrast ratio (min.)	PCS25%
Resolution	3mil/0.076mm@PCS90% Code39, 5mil/0.127mm@PDF417
Reading angle Pitch angle Skew tolerance	Test Conditions: Code 39, 10mil/0.25mm,PCS90% 5°~60° (±5°) 5°~60° (±5°)
Ambient light	100,000 Lux Max.
Sealing	IP42 water and dust protection
Interfaces	Bluetooth, USB, USB HID, VCOM
ENVIRONMENTAL	
Scanner voltage battery	Li-Ion 3.7V/2600mA
Scanner recharge time	Approx. 5 hours
Scanner reads per charge	20,000 times in continuous read
Cradle voltage	DC 5V
Power consumption Power On Stand By Operation	95mA 55mA 70mA
LED indicator	Good read: Green Bluetooth® Communication: Blue
RADIO	
Bluetooth module	Bluetooth® V2.1 EDR
Frequency band	2.402GHz~2.480GHz
Transmission range	Up to 80M(262.47FT.) line of sight
RF output power	Class 1 (under 20dBm)
RELIABILITY	
MTBF	40,000 hours minimum
Cable bending test	30 times/min@500g/90°
Drop resistance	150 cm (59.05 inches)
BARCODE SUPPORTATI	

	SM425
1D SYMBOLOGIES	UPC-A, UPC-E, EAN-8/JAN-8, EAN-13/JAN-13, Code 39, Code 128, Interleaved 25, Industrial 25, Matrix 25, Codabar/NW7, Code 93, China Post, MSI/Plessey, Telepen, GS1 Databar Omni-directional, GS1 Databar Limited, GS1 Databar Expanded
2D SYMBOLOGIES	Data Matrix, PDF 417, QR Code, Micro PDF 417, Micro QR Code, Aztec, Dotcode, Maxi Code, Han Xin Code
	

READING RANGE		
Barcode mil/Depth of field mm		
	3mil Code39	30~70 mm
	4mil Code39	20~80 mm
	5mil Code39	20~100 mm
	6mil Code39	20~120 mm
	10mil Code39	20~170 mm
	13mil Code39	20~200 mm
	20mil Code39	20~250 mm
	20mil QR Code	30~180 mm
	20mil PDF417	30~110 mm
	20mil Data Matrix	30~180 mm
Note: the test is under ambient light 700 ~ 800 Lux.		

GALLERIA



MODELLI DISPONIBILI

CODICE	DESCRIZIONE
995ED030200A33	SM425 SCANMATIC BARCODE SCANNER 2D WIRELESS