


TPTCM60III

- Best quality print quality (200 DPI)
- Paper width: 60mm
- Paper thickness: from 63 to 100 µm
- Printing > 140 mm/sec
- Up to 160mm paper roll diameter (with optional mounting bracket kit)
- RS232 + USB interfaces
- Highly reliable cutter: > 1,000,000 cuts
- Sensors: head temperature, paper presence, print head opening, paper end and near paper end

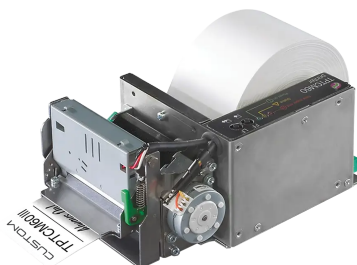

CARATTERISTICHE PRINCIPALI

1D/2D barcode printing capability (QR CODE), On-board international fonts: any language available, Powerful motorised dispenser available, Robust and reliable: durable, lightweight mechanical parts, Versatile: optional paper roll support in 5 positions, Illuminated paper exit (LED), DIN power connector and cut&drop version available.

SPECIFICHE TECNICHE

Paper width	60 mm
Paper weight	60-90 g/m²
External roll diameter	160 mm
Interfaces	RS232;USB

SCHEDA TECNICA

Printing method	Thermal with fixed head
Resolution	200 dpi (8 dots/mm)

Printing speed (max)	>140 mm/sec
Paper width	60 mm
Paper weight	60-90 g/m²
External roll diameter	160 mm
Roll core diameter	25 mm
Emulation	CUSTOM/POS; TPTCMII; CUSTOM TPT
Interfaces	RS232; USB
Print Driver	Windows® (32/64 bit); Linux (32/64 bit); Virtual COM; Android™
Software Tools	PrinterSet; Custom Power Tool; Status Monitor; Custom Windows® API; Driver Manager
Special features	Roll holder included; label or ejector model
Power supply	24 Vdc ± 10%
Typical consumption	1.2 A
Print Head Life	50 km / 100M pulses
Cutter	Full cut
Cutter life	1,000,000 cuts
Operating temperature	0°C ~ 50°C
Dimensions (L x W x H)	Label model: 188 x 112.4 x 195 mm Ejector model: 266 x 115 x 80 mm
Weight	Label model: 1.2 kg Ejector model: 1.5 kg
Box contents	device; quick guide

GALLERIA



MODELLI DISPONIBILI

CODICE	DESCRIZIONE
915KU010300300	PRINTER TPTCM60III USB RS232 EJECTOR